


SMALL InGaAs LINE-SCAN MODULE
WITH SQUARE PIXELS

Xenics
EXOSENS GROUP

XSL SQ Series

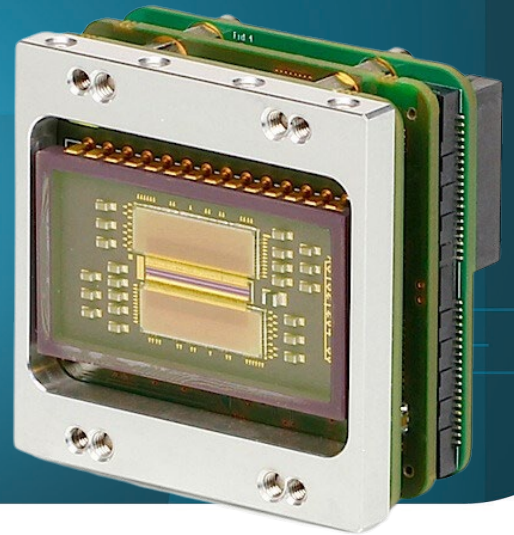

SMALL InGaAs LINE-SCAN MODULE
WITH SQUARE PIXELS

KEY FEATURES



**HIGH SPEED LINE-SCAN
IMAGING UP TO 40 kHz**




**HIGH RESOLUTION 1024
RECTANGULAR PIXELS OPTION**



INDUSTRY STANDARD INTERFACES

The XSL square (SQ) series, based on an in-house developed linear detector, offer affordable short-wave infrared (SWIR) line-scan images. XSL SQ camera modules are able to image line rates up to 40 kHz. The modules come with an industry-standard CameraLink, GigE Vision or QTE Samtec interface. Depending on the imaging requirements, three resolutions of 512, 1024 or 2048 pixels are offered.

XSL SQ Series

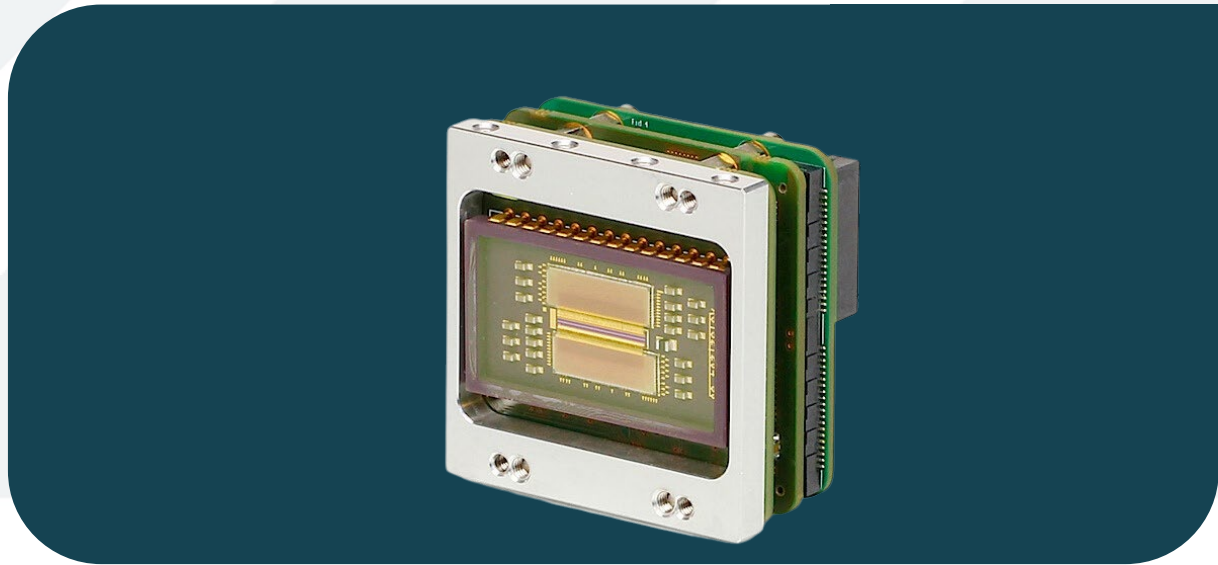

KEY PERFORMANCES

Sensor format/Pixel pitch	512 or 1024 or 2048 pixels / 12.5 or 25 μm
Detector type	InGaAs photodiode array with CTIA ROIC
Integration type	Snapshot - global shutter
Spectral range	900 - 1700 nm
Max line rate	40 kHz
Power consumption	3.9 W (CL); 6.3 W (GigE); 2.3 W (16 bit DV)
Power supply voltage	DC 12 V; DC 3.3 V (16 bit DV)

FUNCTIONS & INTERFACES

Command and control/Digital output format	CameraLink Base; GigE Vision; QTE Samtec
Connector trigger	SMA (CL and GigE)
Camera dimensions (width x height x length)	45 mm x 45 mm x 37 mm (CL); 45 mm x 45 mm x 55 mm (GigE); 45 mm x 45 mm x 28 mm (16-bit DV)
Optical interface (optional)	C-mount or M42
Camera weight	55 gr (CL), 96 gr (GigE); 43 gr (16 bit DV)

PRODUCT SELECTOR GUIDE

XEN-000393 (XSL 512 SQ CL)	XEN-000397 (XSL 512 SQ GigE)
XEN-000145 (XSL 512 SQ 16bitDV)	XEN-000395 (XSL 1024 SQ CL)
XEN-000398 (XSL 1024 SQ GigE)	XEN-000392 (XSL 1024 SQ 16bitDV)
XEN-000396 (XSL 2048 SQ CL)	XEN-000399 (XSL 2048 SQ GigE)
XEN-000394 (XSL 2048 SQ 16bitDV)	

advancedimaging@exosens.com



exosens.com

EXOSENS
REVEAL THE INVISIBLE