

HIGH DYNAMIC RANGE
INFRARED CAMERA

TELOPS
EXOSENS GROUP

HDR M700



*Expanded In-Scene Dynamic
Range Performance*

KEY FEATURES



**EFFICIENT MEASUREMENT OF HIGH
THERMAL CONTRAST SCENES**



**IN-SCENE DYNAMIC RANGE OF TO 900
DEGREES WITH A SINGLE EXPOSURE
TIMETHERMAL CONTRAST SCENES**



**ON-CHIP SATURATION MANAGEMENT
SOLUTION**




**TELOPS REAL-TIME TEMPERATURE
CALIBRATION (RTTC)**


The HDR M700 represents a revolution in high dynamic range infrared imaging. Traditional midwave infrared cameras can effectively measure a span of about 150 degrees with a single exposure time before experiencing image saturation. Telops HDR M700 utilizes an advanced on-chip saturation management solution to extend the single-exposure time dynamic range to a span of over 900 degrees enabling analysis of scenes and objects exhibiting strong thermal contrast.



HDR M700

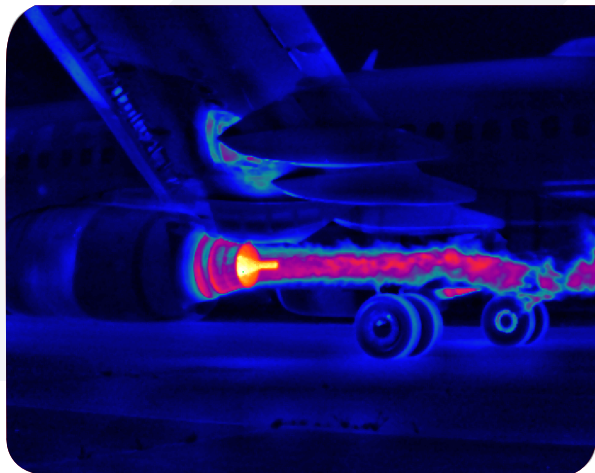

High dynamic range enables detailed imaging of a broad range of target temperatures in the same scene

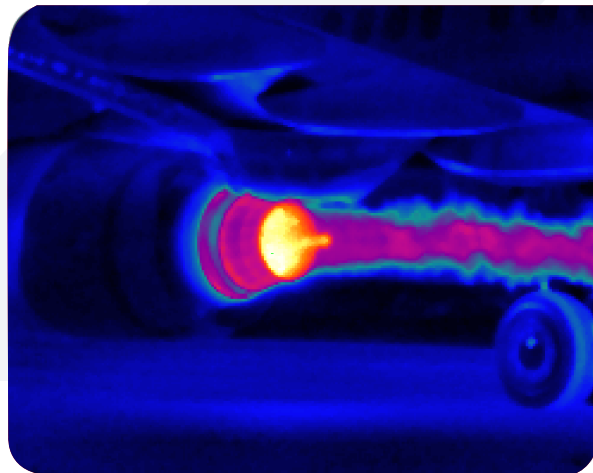

Increased in-scene dynamic range allows for precise visualization of hot target behavior without sacrificing image quality for lower temperature objects

KEY PERFORMANCES

Detector Type	SLS
Spectral Range	3.0 – 5.0 μm
Aperture Size	F/4
Frame Rate	650 Hz @ 640 × 512
Maximum Frame Rate	40 000 Hz

RESISTANCE

Environmental Resistance	IP67
Operational Temperature	-15 oC to +50 oC
Storage Temperature	-35 °C to +60 °C
Typical NETD	20 mK
Exposure Time	1 μs to full frame rate

MOUNT TYPE

Lens Mount	Threaded
------------	----------

sales@telops.com



telops.com

EXOSENS
REVEAL THE INVISIBLE